


Wi-Safe 2 Low Frequency Sounder

Product Image



Product Dimensions (mm)

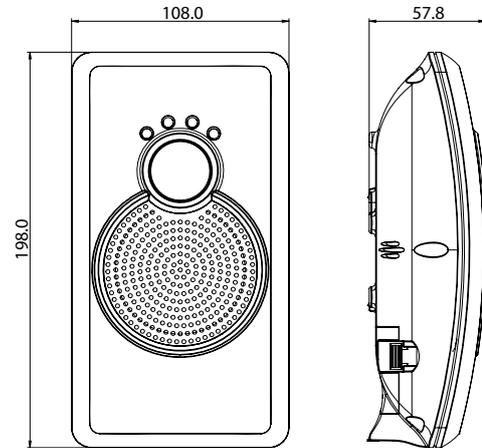

Model Number	W2-LFS-630
Retail Description	N/A
Retail EAN Number	N/A
Retail Packaging Format	N/A
Retail Packaging Dimensions WxHxD	N/A
Retail Packaging Weight	N/A
Retail SRP Quantity	N/A
Trade Description	Wi-Safe 2 Low Frequency Sounder
Trade EAN Number	O816317002299
Trade Packaging Format	Recycled cardboard box
Trade Packaging Dimensions WxHxD	273mm x 113mm x 66mm
Trade Packaging Weight	77g
Trade Outer Box Quantity	10
Warranty	5 years
Technology	Wi-Safe 2
Operation AC/DC	AC/DC
Battery Type	5 year rechargeable NiMH power pack
Product Weight	635g (Including Low Frequency Sounder, AC mains adaptor, manual, batteries and fixings)

Unit Dimensions (max) WxHxD (mm)	108 x 198 x 57.8
Alert Type	Loud continuous blasts, 520MHz Square wave
Operating Temperature	-4°C to +38°C
Operating Humidity	Up to 90% RH non condensing
Installation Positions	Freestanding or wall mounted vertically or horizontally
Standards	N/A

Health & Safety Information	
Storage Temperature	-20°C to +60°C
Storage Humidity	Up to 93% RH% non-condensing
Storage Licensing Requirement	N/A
Isotope Activity	N/A

Wireless features (Wi-Safe 2)	
Operating Frequency	868 MHz
Max no. of connected units (network)	50 units
Networking	Multi-directional communication
Compatibility	Compatible with all FireAngel Wi-Safe 2 products
Range	35m (over 200m in clear air)

